

LITHIUM-ION POLYMER RECHARGEABLE BATTERY

SPECIFICATIONS

Model	: LIP503450.2
Description	: Lithium-Ion Polymer rechargeable battery (RoHS compliant)
Dimension	: Max. 5.3x35x51.5mm (bare cell)
Nominal Capacity	: 850 mAh (Min. 820) at 170mA rate discharge to 2.75V at 25°C
Nominal Voltage	: 3.70 Volt
Cut-Off Voltage	: 2.75 Volt
Approximate Weight	: 18g
Internal Impedance	: <70mΩ (per bare cell with 1KHz AC testing at full charge)
Cycle Life	: Over 200 (Typ. 300) standard charge/discharge cycles
Charging	: Using dedicated CC/CV (4.20+/-0.03V) battery charger only Charging with CC (Constant Current) to 4.20V, then charge with CV (Constant Voltage) till charge current <42.5mA Standard - 425 mA x 3 hours (Ref.) Quick - Max. 850 mA x 2 hours (Ref.)
Discharging	: Max. continuous current 850mA (1C) Max. burst current 1700mA (2C - 7sec., conditions apply)
Temperature Environment	: Charge 0°C to 45°C Discharge -20°C to 60°C Storage -20°C to 20°C (1 year) -20°C to 45°C (3 months) -20°C to 60°C (1 month) 10°C to 25°C (Recommended)
Warranty	: Limited warranty is provide against defects of poor workmanship for 12 months from date of shipment. Problem caused by misuse, mishandling, malfunction of equipment, or mix-use of cell is not under this warranty. Replacement of cell is limited to 1-to-1 only
Long Term Storage	: Long term storage may cause loss of capacity.
PCM Specification	: NO PCM
Appearance	: No scratch, rust, discoloration, leakage which may adversely affect commercial value of the cell
Standard Test Condition	: Unless otherwise specified, all test are conducted at temperature 25+/-5°C and relative humidity 60+/-15% The ammeter and voltmeter with accuracy grade 0.5 or higher The slide caliper with scale 0.01mm The impedance meter with AC 1kHz measurement
Standard Charge	: Charge at 425mA constant current until 4.2V. Then charge at constant voltage of 4.2V with taper charge current. Max. charging time is 3.0 hours
Standard Discharge	: Discharge with current 170mA to 2.75V within 1 hour after standard charge Initial standard discharge capacity >= 820mAh (3 cycles allowed)

Information is for references only.

Model : LIP503450.2
Version : 2.11


WELL LINK
INDUSTRIAL LIMITED

AA14R60

LITHIUM-ION POLYMER RECHARGEABLE BATTERY

SPECIFICATIONS

Internal Impedance	: Measured at AC 1kHz within 1 hour after standard charge Initial internal impedance $\leq 70\text{m}\Omega$
Cycle Life	: After 100 standard charge/discharge cycles plus 1 day Capacity $\geq 680\text{mAh}$
Capacity Retention	: Discharge measured after storage for 28 days after standard charge Initial capacity retention $\geq 722.5\text{mAh}$
Ex-Factory Condition	: The cell should be shipped in 50% charged state. OCV $\geq 3.8\text{V}$
Drop Test	: No fire, no explosion for dropping onto 18-20mm thick oak-board from 1.0m height at a random direction 6 times
Vibration Test	: No fire, no explosion for vibrating along 2 mutually perpendicular axes with total excursion of 1.8mm and with frequency cycling between 10Hz and 55Hz by 1Hz/min
Overcharge Test (Single Cell only)	: No fire, no explosion for charging battery cell with 425mA constant current until 4.6V
External Short Circuit Test (Single Cell only)	: No fire, no explosion for short circuit the standard charged battery cell by connecting positive and negative terminal by less than 50m Ω wire
Heating Test (Single Cell only)	: No fire, no explosion for heating a battery cell in a gravity convection or circulating air oven. Temperature of the oven is to be raised at a rate of 5 \pm 2 $^{\circ}\text{C}$ to a temperature of 130 \pm 2 $^{\circ}\text{C}$

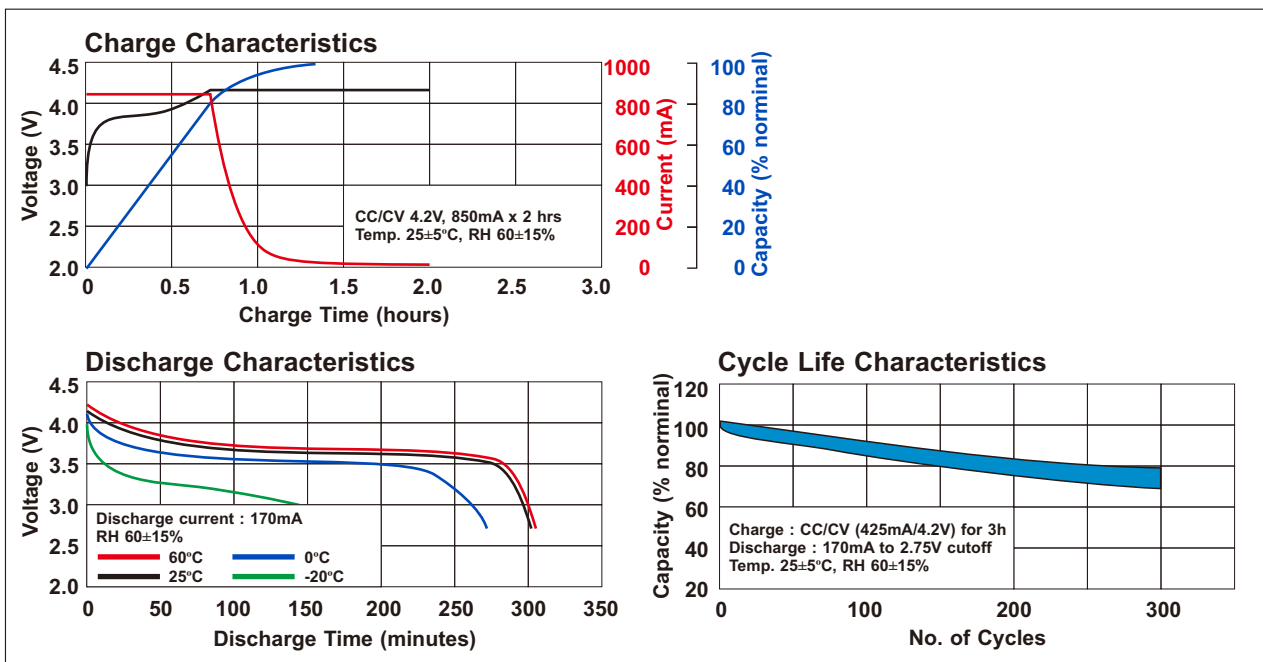

Information is for references only.

Model : LIP503450.2
Version : 2.11

WELL LINK
INDUSTRIAL LIMITED

AA14R60

LITHIUM-ION POLYMER RECHARGEABLE BATTERY

PROPER USE AND HANDLING

Customer of lithium ion polymer battery should employ appropriate cautions in order to obtain optimum performance and safety.

- Charging** : Charging current should less than the maximum charging current specified in the specification
Charging voltage must up to the voltage specified in the specification
Do not charge battery over the specified time in the specification
Charging temperature should be within the specified range in the specification
Reverse charging should be strictly prohibited
Improper charging may generate heat, smoke, rupture or flame, and cause damage to the battery
- Discharging** : Discharging current should be less than the maximum discharging current specified in the specification
Discharging temperature should be within the specified range in the specification
Do not over discharge the battery below 2.0V/cell
Over discharge may occur by self-discharge if the battery is left for a very long time without any use
Improper discharge may cause loss of performance
- Storage** : Storage temperature should be within the specified range in the specification
Storage is recommended in low humidity, nop corrosive gas atmosphere
Long term storage may cause loss of capacity
- Cycle Life** : Cycle life differs by conditions of charging, discharging, operating temperature and/or storage condition
Level of capacity differs by cycles of battery used
- Product Design** : Do not solder directly on bare cell
Battery should be positioned far from heat source and heat components
Appropriate shock absorber should be equipped to minimize shock on the battery
Protection circuit against overcharge, over discharge, over current should be equipped to insure safety in case of misuse
Battery should be designed to connect only to specified charger and system
Reverse connection of battery should be avoided in system design
Improper product and system design may cause loss of battery performance
- Product Assembly** : Battery cell should be inspected visually before product assembly to avoid usage of damaged cell (for example, sleeve damage, battery distortion, or leaking)
Excessive force on the battery terminals and battery surface should be avoided
Precaution should be taken when battery is moved / transported to other place
Do not disassembly, short-cutcuit, incinerate, immersion in water, and mix use of battery
Battery should be disposed in discharged state
Improper handling may cause loss of battery performance
- Warning** : The battery may present risk of fire and chemical burn if mistreated. Keep away battery from children.

Information is for references only.


Model : LIP503450.2
Version : 2.11

WELL LINK
INDUSTRIAL LIMITED

AA14R60

LITHIUM-ION POLYMER RECHARGEABLE BATTERY

PRODUCT DRAWING

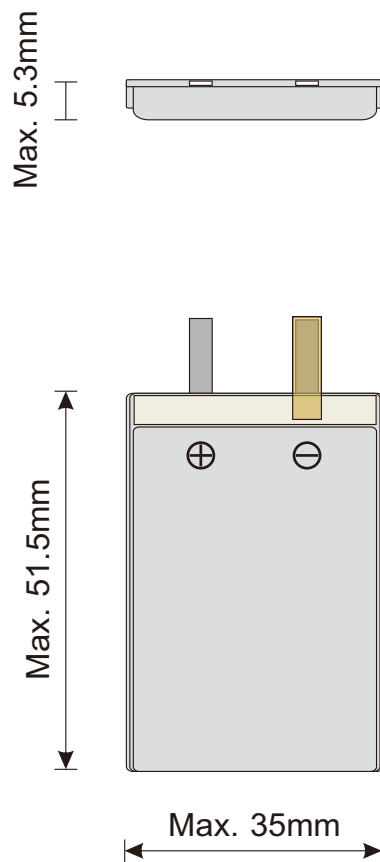

PRINTING :

KINETIC (Lot. YYMM)
LIP503450.2
Li-Po 3.7V 850mAh



Information is for references only.

Model : LIP503450.2
Version : 2.11

WELL LINK
INDUSTRIAL LIMITED

AA14R60